

Adjusted Winner: From Splitting to Selling

Robert Brederbeck

TU Clausthal, Institut für Informatik
Clausthal-Zellerfeld, Germany
robert.bredereck@tu-clausthal.de

Bin Sun

TU Clausthal, Institut für Informatik
Clausthal-Zellerfeld, Germany
bin.sun@tu-clausthal.de

Eyal Briman

Ben-Gurion University of the Negev
Beer-Sheva, Israel
briman@post.bgu.ac.il

Nimrod Talmon

Ben-Gurion University of the Negev
Beer-Sheva, Israel
talmonn@bgu.ac.il

ABSTRACT

The *Adjusted Winner* (AW) method is a fundamental procedure for the fair division of *indivisible* resources between two agents. However, its reliance on splitting resources can lead to practical complications. To address this limitation, we propose an extension of AW that allows the sale of selected resources under a budget constraint, with the proceeds subsequently redistributed, thereby aiming for allocations that remain as equitable as possible. Alongside developing this extended framework, we provide an axiomatic analysis that examines how equitability and envy-freeness are modified in our setting. We then formally define the resulting combinatorial problems, establish their computational complexity, and design a fully polynomial-time approximation scheme (FPTAS) to mitigate their inherent intractability. Finally, we complement our theoretical results with computer-based simulations.

KEYWORDS

Computational Social Choice; Fair Division

ACM Reference Format:

Robert Brederbeck, Eyal Briman, Bin Sun, and Nimrod Talmon. 2026. Adjusted Winner: From Splitting to Selling. In *Proc. of the 25th International Conference on Autonomous Agents and Multiagent Systems (AAMAS 2026)*, Paphos, Cyprus, May 25 – 29, 2026, IFAAMAS, 9 pages. <https://doi.org/10.65109/http://doi.org/10.65109/QQCP5375>

1 INTRODUCTION

The *Adjusted Winner* (AW) method [10] is a foundational protocol for fair division between two agents. It assumes that each agent has a confidential additive utility function $u_1, u_2 : \mathcal{P}(R) \rightarrow \mathbb{N}_0$ over a finite set of indivisible resources R , and is facilitated by a neutral mediator. The agents' utility functions are defined on a common cardinal scale, i.e., $\sum_{r \in R} u_1(r) = \sum_{r \in R} u_2(r)$, so that their utilities are directly comparable. The allocation proceeds in two phases:

Phase 1 (Initial Allocation): Each resource $r \in R$ is allocated to the agent who values it more: if $u_1(r) > u_2(r)$, then r is assigned to Agent 1; otherwise, it is assigned to Agent 2. This results in a tentative allocation (S_1, S_2) .



This work is licensed under a Creative Commons Attribution International 4.0 License.

Proc. of the 25th International Conference on Autonomous Agents and Multiagent Systems (AAMAS 2026), C. Amato, L. Dennis, V. Mascardi, J. Thangarajah (eds.), May 25 – 29, 2026, Paphos, Cyprus. © 2026 International Foundation for Autonomous Agents and Multiagent Systems (www.ifaamas.org). <https://doi.org/10.65109/http://doi.org/10.65109/QQCP5375>

Phase 2 (Adjustment): To equalize the total utilities of the two agents, the algorithm identifies the agent who currently has the higher total utility (the *advantaged* agent a) and considers transferring resources from agent a to the other agent b . The resources owned by the advantaged agent are sorted in non-decreasing order of the ratio $\frac{u_a(r)}{u_b(r)}$. Resources are then transferred in this order until the agents' total utilities become equal, $u_1(S_1) = u_2(S_2)$. If exact equality cannot be achieved by transferring whole resources, the last transferred resource is divided fractionally between the agents; this fractional transfer is referred to as a *split*.

Despite its prominence,¹ some theoretical properties and computational aspects of AW remain relatively under-explored [3, 9, 17, 24, 25, 27]. The method is especially notable for guaranteeing *equitable*, *envy-free*, and *Pareto-optimal* allocations under additive valuations. These strong fairness properties, however, crucially depend on the ability to divide one (arbitrary) indivisible resource. Indeed, the possibility of splitting a contested resource is fundamental to AW's guarantees, which can render the method less applicable in settings where such divisions are infeasible or undesirable.

Our study addresses the practical infeasibility of resource splitting by permitting the sale of selected resources, subject to a global budget and resource-specific costs that capture the logistical or emotional burdens involved. We deliberately retain the Adjusted Winner (AW) framework because it is both simple and transparent, allowing parties to clearly understand how the allocation is determined. Yet the reliance of AW on fractional division is often unrealistic. For instance, a shared rented apartment or a sentimental family heirloom cannot be literally divided, and even selling such resources may involve substantial emotional or procedural costs. Our extension preserves the intuitive and user-friendly nature of AW while replacing fractional splits with resource sales, maintaining its transparency while accommodating real-world constraints.

Optimizing Equitability under Indivisibility Constraints. Instead of maintaining a formal guarantee of equitability at the cost of ignoring the indivisibility of resources, as in the classic AW method, we explicitly model indivisibility and aim to optimize equitability within feasible bounds. While exact equitability may still be attainable in special cases, we do not enforce it when it would require impractical or infeasible splits. The framework (which can be seen as an extension of AW) permits the sale of multiple resources under

¹<https://pages.nyu.edu/adjustedwinner/>

a mediator-defined global budget, allowing equitability to be optimized subject to indivisibility, selling costs, and potential revenue from sold resources.

Welfare from Selling. Allowing the sale of resources naturally requires integrating both the agents’ utilities for allocated resources and the revenue generated from selling resources. Accordingly, we define each agent’s welfare as the sum of the utility they obtain from their allocated resources and the share of the revenue they receive from sold resources. Once a plan specifying which resources are allocated and which are sold has been determined, the total revenue from the sold resources is divided between the two agents so as to make their resulting welfares as balanced as possible.

Although agents cannot resell the resources they receive within our setting, it is reasonable to expect that, if a resale were to occur later on the open market, the obtainable revenue would not exceed the higher valuation among the two agents. At the same time, in many practical settings such as urgent liquidations, private exchanges, or emotionally constrained sales, market transactions tend to under-capture value. Therefore, we assume that the revenue obtainable from selling any resource does not exceed the higher utility that either agent assigns to it.

Cost of Selling. In this framework, selling a resource comes with its own cost, which might reflect the effort, time, or extra fees required to complete a sale. There is an overall limit (budget) on how much can be spent on selling. Importantly, these selling costs are of a completely different nature from the benefit or satisfaction the agents receive from the resources themselves. For example, when dividing up property during a divorce, selling a car or a house often involves a lot of paperwork, legal procedures, and sometimes additional expenses.

A particularly relevant special case arises when costs are restricted to $\{0, \infty\}$ or to unary values. The former allows one to designate certain resources as unsellable (by assigning an infinite cost) or freely sellable (with zero cost), while the latter effectively limits the number of resources that can be sold. These special cases make the framework flexible enough to capture both continuous and discrete forms of selling constraints.

Positive Welfare. Since in our setting all utilities and prices are nonnegative, it is straightforward to see that both agents obtaining zero welfare constitutes a trivial yet uninformative form of fairness. To exclude such degenerate cases, we require that any feasible plan must yield strictly positive welfare for both agents.

Our contributions. We introduce the *Dispute Settlement with Indivisible Resources and Sale (DSIRS)* framework, which provides a principled foundation for resolving disputes in contexts where resources cannot be divided, either for practical or emotional reasons. Within this framework, we formalize a family of Adjusted Winner without Splitting (AWNS) combinatorial optimization problems and analyze both their computational complexity and fairness properties. In particular, we establish an FPTAS for the AWNS- ρ problem, a parameterized variant in which ρ measures the ratio between the agents’ achieved welfare levels. Finally, we complement our theoretical results and modeling by computer-based simulations. In the paper, proofs of selected results are omitted from the main text and provided in the full version [12].

2 RELATED WORK

We briefly survey prior work related to fairness, indivisibility, and conflict resolution in fair division problems.

Control in Allocation and Elections. Modifying the availability of resources to influence outcomes is conceptually related to control in voting, where agents alter the set of candidates or voters to achieve their preferred result [5, 18, 22]. In fair division, similar ideas arise when resources are pre-selected, withheld, or reweighted to affect final allocations [5]. Our approach can be interpreted as a constrained form of resource selling aimed at preventing splits rather than optimizing strategic advantage.

Fair Division as Conflict Resolution. Fair division mechanisms have long been used as tools for conflict resolution, particularly in situations where indivisibilities lead to impasses [8, 10, 23]. In such cases, modifying the problem instance—e.g., by deleting or monetizing contentious resources—can facilitate compromise. Our work formalizes this intervention-based approach within the AW framework, providing theoretical and computational guarantees for fairness- and efficiency-oriented resource selection strategies.

Resource Sale (Donation) and Envy-Freeness. Bilò et al. [6] consider achieving envy-freeness by selling resources and redistributing proceeds. Their work focuses on general allocation frameworks and provides a PTAS for two agents. Our model differs in that it retains the AW structure and leverages resource sale not for reallocation per se, but to satisfy constraints that preclude splits, thereby preserving properties of the original AW method under additional feasibility constraints. Chaudhury et al. [16] study the existence of EFX allocations for agents with general valuations and show that donating a small number of non-envied resources to charity, which can be seen as a degenerate case of a sale with zero payment, suffices to ensure the existence of such allocations.

Fairness Guarantees with Indivisible Resources. Since we consider all resources to be truly indivisible—unlike in the Adjusted Winner method—we cannot guarantee equitability, envy-freeness and Pareto optimality. This limitation is not unique to our approach: it is intrinsic to the setting. As emphasized in recent algorithmic surveys on discrete fair division [2, 4], exact fairness guarantees such as envy-freeness and proportionality become infeasible once resources become indivisible, motivating relaxations such as envy-freeness up to one resource (EF1) [1, 26]. Concurrently, empirical studies of family property and inheritance mediation report that disputants and neutrals prioritize enforceable whole-resource outcomes, confidentiality, and efficiency over fractional allocations or theoretically ideal fairness [19]. Guided by this evidence, our model deliberately avoids unattainable guarantees and instead promotes a policy of minimal inequality: it ensures that the final allocation consists only of indivisible resources, and permits resource sales under predefined constraints to reduce disparity between the agents. Chakraborty et al. [15] propose another AW-style algorithm that respects indivisibility and guarantees weighted envy-freeness up to one item (EF1) for agents with arbitrary entitlements.

Divisible Revenue. Halpern and Shah [21] proposed achieving envy-freeness through external monetary subsidies, where a third

party provides additional divisible resources to offset fairness violations. Relatedly, more recent work has studied conceptually equivalent mechanisms under different names, such as subsidies or dollars (money) [13, 14]. Our work is conceptually complementary: instead of adding external money, we restore balance by selling certain resources to generate divisible revenue within the system.

3 BASICS AND MODEL

In this section, we formally introduce the DSIRS framework for allocating indivisible resources with the option of selling some resources and examine the new challenges that arise under the no-split constraint. These considerations motivate a family of optimization problems that we study in the subsequent sections.

3.1 Framework (DSIRS)

We begin with a commonly encountered scenario and develop a framework based on it. Two agents, Agent 1 and Agent 2, seek to allocate their indivisible assets. We call this framework *Dispute Settlement with Indivisible Resources and Sale (DSIRS)*.

Definition 3.1 (DSIRS). An instance of DSIRS $\mathcal{I} = \langle R, u_1, u_2, p, c, B \rangle$ consists of:

- a finite set of indivisible resources, $R = \{r_1, r_2, \dots, r_m\}$,
- an additive utility function $u_j : R \rightarrow \mathbb{N}_0$ for each agent $j \in \{1, 2\}$, s.t. $\sum_{r \in R} u_1(r) = \sum_{r \in R} u_2(r)$,
- an additive price (revenue) function $p : R \rightarrow \mathbb{N}_0$, where $p(r)$ denotes the revenue generated from selling r , s.t. $p(r) \leq \max\{u_1(r), u_2(r)\}$,
- an additive selling cost function $c : R \rightarrow \mathbb{N}_0$,
- a budget for total cost $B \in \mathbb{N}_0$.

Remark. By additivity, we denote $u_j(S) = \sum_{r \in S} u_j(r)$ for all $S \subseteq R$ and $j \in \{1, 2\}$; $p(S) = \sum_{r \in S} p(r)$ for all $S \subseteq R$; $c(S) = \sum_{r \in S} c(r)$ for all $S \subseteq R$. For convenience, when the indices of the resources are fixed and clear from the context, we denote $u_j(r_i)$, $p(r_i)$ and $c(r_i)$ by u_{ij} , p_i and c_i , respectively.

Having defined an instance of DSIRS, we now specify what constitutes a solution. Every resource is required to be in exactly one of three mutually exclusive subsets: S_0 , S_1 , and S_2 , where S_0 contains the resources sold to generate divisible funds, and S_1 and S_2 contain the resources allocated to agents 1 and 2, respectively. A tuple $\mathcal{S}(\mathcal{I}) = \langle S_0, S_1, S_2 \rangle$ is called a *plan (solution)* of an instance of DSIRS $\mathcal{I} = \langle R, u_1, u_2, p, c, B \rangle$. When the instance is clear from context, we write \mathcal{S} . The welfare functions for a plan $\mathcal{S} = \langle S_0, S_1, S_2 \rangle$ in instance \mathcal{I} are defined as

$$W_1(\mathcal{S}, \mathcal{I}) = u_1(S_1) + q \cdot p(S_0), \quad W_2(\mathcal{S}, \mathcal{I}) = u_2(S_2) + (1 - q) \cdot p(S_0),$$

where the fraction $q \in [0, 1]$ specifies how the revenue from the sold resources is divided between the two agents. For any fixed S_0, S_1, S_2 , this fraction is uniquely determined by requiring the two agents' welfares to be as balanced as possible. Formally,

$$q = \max\left(0, \min\left(1, \frac{p(S_0) - u_1(S_1) + u_2(S_2)}{2p(S_0)}\right)\right).$$

Thus, q is not a decision variable of the plan but a derived quantity that ensures minimal welfare imbalance given the chosen sets.

Remark. $W_i(\mathcal{S}, \mathcal{I})$ denotes the welfare that Agent i obtains under plan \mathcal{S} for instance \mathcal{I} . When the instance is clear but multiple plans are considered, we write $W_i(\mathcal{S})$ for the welfare of Agent i under plan \mathcal{S} . When both the instance and plan are clear from context or when referring to the welfare of Agent i in general, we write W_i for brevity. Unless otherwise specified, the value of q is determined by the choice of S_0, S_1, S_2 as described above. In certain special cases, we write $\mathcal{S}(\mathcal{I})$ as $\langle S_0, S_1, S_2, q' \rangle$, where the parameter q is fixed to the given value q' .

A plan \mathcal{S} is called *feasible* if $W_1(\mathcal{S}), W_2(\mathcal{S}) > 0$ and $c(S_0) \leq B$. That is, both agents obtain strictly positive welfare, and the total cost associated with selling resources does not exceed the budget B . The quantity $c(S_0)$ is also referred to as the *organizational cost*. In the following, we restrict our attention to feasible plans.

3.2 Fairness Analysis

Here, we investigate some fairness properties of the DSIRS framework. We introduce two equitability thresholds: (a) welfare difference $d = |W_1 - W_2|$ and (b) welfare ratio $\rho = \max\{\frac{W_1}{W_2}, \frac{W_2}{W_1}\}$. The following proposition shows that, for any fixed partition S_0, S_1, S_2 of the resources, the same choice of q simultaneously minimizes both objectives.

PROPOSITION 3.2. *Let \mathcal{I} be an instance of DSIRS and let S_0, S_1, S_2 be a partition of the resources R . Define*

$$q_1 = \arg \min_{q' \in [0, 1]} |u_1(S_1) - u_2(S_2) + (2q' - 1) \cdot p(S_0)|,$$

$$q_2 = \arg \min_{q' \in [0, 1]} \max\left\{\frac{W_1'}{W_2'}, \frac{W_2'}{W_1'}\right\},$$

where $\frac{W_1'}{W_2'} = \frac{u_1(S_1) + q' \cdot p(S_0)}{u_2(S_2) + (1 - q') \cdot p(S_0)}$. Then $q_1 = q_2$.

COROLLARY 3.3. *For any plan \mathcal{S} , $W_1(\mathcal{S}) - W_2(\mathcal{S}) = 0$ if and only if $\frac{W_1(\mathcal{S})}{W_2(\mathcal{S})} = 1$.*

The proposition shows that, for any *fixed* partition S_0, S_1, S_2 , the same choice of q simultaneously minimizes both the welfare difference d and the welfare ratio ρ . In contrast, when the partition itself is part of the decision (i.e., S_0, S_1, S_2 are not given but chosen to optimize the objective), the optimal partitions for minimizing d and minimizing ρ may differ. The following proposition formalizes this observation.

PROPOSITION 3.4. *Given an instance of DSIRS, a plan \mathcal{S} that minimizes d may not minimize ρ , and vice versa.*

We also consider the widely studied concept of envy-freeness as a fairness criterion [11], and provide a definition tailored to our framework. However, as we will demonstrate shortly, such a plan does not always exist in our setting. Furthermore, the pursuit of envy-freeness may be incompatible with our earlier objective of minimizing equitability thresholds such as d or ρ .

Definition 3.5 (Envy-freeness). For a plan $\mathcal{S} = \langle S_0, S_1, S_2 \rangle$, define the (signed) envies:

$$\text{envy}_1(\mathcal{S}) = W_1(\mathcal{S}') - W_1(\mathcal{S}), \quad \text{envy}_2(\mathcal{S}) = W_2(\mathcal{S}') - W_2(\mathcal{S}),$$

where $S' = \langle S_0, S_2, S_1, 1 - q \rangle$ and q is determined by S . The plan is *envy-free* if

$$\text{envy}_1(S) \leq 0 \quad \text{and} \quad \text{envy}_2(S) \leq 0.$$

That is, neither agent would like to have the other’s bundle (with revenue share).

PROPOSITION 3.6. *Given an instance of DSIRS, an envy-free plan does not always exist.*

PROPOSITION 3.7. *Given an instance of DSIRS, a plan S with minimum d may not be envy-free, whereas an envy-free plan S' may not have minimum d .*

By Corollary 3.3 and Proposition 3.7, we immediately obtain the following corollary.

COROLLARY 3.8. *Given an instance of DSIRS, a plan that has minimum ρ may not be envy-free, whereas an envy-free plan may not have minimum ρ .*

3.3 Adjusted Winner without Splitting (AWNS)

The DSIRS framework closely parallels the Adjusted Winner (AW) algorithm. However, directly applying AW in this context may result in resource splits, violating the indivisibility constraint. Accordingly, for any subset $S_0 \subseteq R$ selected for sale, we consider only the partial execution of AW on the residual instance $R \setminus S_0$, halting the procedure immediately before a split would occur. This ensures that all resources in $R \setminus S_0$ are allocated integrally to one agent or the other. We refer to the result as the *AW-derived plan*.

Definition 3.9 (AW-derived plan). Given an instance I and a subset $S_0 \subseteq R$ of resources to be sold, the *AW sub-plan* $SP(S_0, I)$ is the allocation (G_1, G_2) produced by running the Adjusted Winner (AW) algorithm on $R \setminus S_0$, halting immediately in Phase 2 (a) before any split would occur or (b) when $|u_1(S_1) - u_2(S_2)| \leq p(S_0)$ holds, since in that case the welfare gap between the agents can already be balanced by redistributing the sale revenue. The *AW-derived plan* $P_{AW}(S_0, I)$ is the triple $\langle S_0, S_1, S_2 \rangle$.

The following example demonstrates how selling resources can eliminate the need for splitting.

Example 3.10. Consider a couple, Alex and Belle, who decide to divide their joint possessions: a vintage Rolex watch r_1 , four local art pieces r_2 – r_5 , and a designer bag r_6 . Their valuations and potential sale revenues are listed below. Under the classical Adjusted Winner (AW) procedure, the watch r_1 would need to be split to achieve equity, even after transferring all local art pieces from Alex to Belle (Alex 56, Belle 50).

	r_1	r_2	r_3	r_4	r_5	r_6
Alex	56	11	11	11	11	0
Belle	50	10	10	10	10	10
Revenue	50	5	5	5	5	5

Considering selling the watch r_1 , Alex receives $\{r_2, r_3, r_4, r_5\}$ and Belle receives $\{r_6\}$. Dividing the revenue proportionally (Alex 8, Belle 42) makes both agents’ welfares equal at 52.

This illustrates how replacing splitting with selling can restore fairness without compromising indivisibility, leading to our *Adjusted Winner without Splitting (AWNS)* framework.

3.4 Problem Formulations

We introduce the family of AWNS problems, each of which seeks to prevent the splitting of resources between agents when applying the Adjusted Winner (AW) algorithm.

Definition 3.11 (AWNS-D). Given an instance of DSIRS I , find $S_0 \subseteq R$ such that the AW-derived plan $S = P_{AW}(S_0, I)$ minimizes

$$d = |W_1(S, I) - W_2(S, I)|.$$

Definition 3.12 (AWNS-D-c). Given an instance of DSIRS I and a fixed $d \geq 0$, find $S_0 \subseteq R$ such that the AW-derived plan $S = P_{AW}(S_0, I)$ satisfies $|W_1(S, I) - W_2(S, I)| \leq d$ and minimizes

$$c(S_0) = \sum_{r \in S_0} c(r).$$

Definition 3.13 (AWNS- ρ). Given an instance of DSIRS I , find $S_0 \subseteq R$ such that the AW-derived plan $S = P_{AW}(S_0, I)$ minimizes

$$\rho = \frac{\max\{W_1(S, I), W_2(S, I)\}}{\min\{W_1(S, I), W_2(S, I)\}}.$$

Definition 3.14 (AWNS- ρ -c). Given an instance of DSIRS I and a fixed $\rho \geq 1$, find $S_0 \subseteq R$ such that the AW-derived plan $S = P_{AW}(S_0, I)$ satisfies $\frac{\max\{W_1(S, I), W_2(S, I)\}}{\min\{W_1(S, I), W_2(S, I)\}} \leq \rho$ and minimizes

$$c(S_0) = \sum_{r \in S_0} c(r).$$

The next two sections address the algorithmic and complexity aspects of the AWNS problem family. Section 4 establishes the computational complexity and inapproximability of these problems, while Section 5 presents an FPTAS for AWNS- ρ .

4 COMPUTATIONAL COMPLEXITY AND INAPPROXIMABILITY

In this section, we show that all above problems except for AWNS- ρ are weakly NP-hard and inapproximable. To make these hardness results precise, we first recall the formal notion of multiplicative approximation [29].

Definition 4.1 (Multiplicative Approximation). Let Q be a minimization problem whose feasible solutions yield objective values $f(\cdot)$. For any instance, let

$$\text{OPT} = \min_{\text{sol} \in \mathfrak{S}_{\text{ALL}}} f(\text{sol}), \quad \text{ALG} = f(\text{sol}_{\text{alg}}),$$

where sol_{alg} is the solution returned by a polynomial-time algorithm, $\mathfrak{S}_{\text{ALL}}$ is the set for all feasible solutions. Then the algorithm is called a *multiplicative β -approximation* if

$$\text{ALG} \leq \beta \cdot \text{OPT},$$

for all instances, where $\beta \geq 1$ is the approximation ratio. If no constant β satisfies this, we say the inapproximability holds for Q .

This section centers on Theorem 4.2, which establishes the inapproximability of AWNS-D-c. Before the proof begins, we state the following remarks.

Remark. Theorem 4.2 relies on the $\frac{1}{k}$ -Balanced Partition problem: Given a set of integers $H^* = \{a_1, a_2, \dots, a_m\}$, the goal is to find a subset $A \subseteq H^*$ with $|A| = \frac{1}{k}|H^*|$ and $\sum A = \frac{1}{2} \sum H^*$. This problem is proven to be NP-hard in the detailed version.

Remark. When $c(r) = 1$ and $p(r) = 0$ for all $r \in R$, choosing resources to sell is exactly choosing them to "delete" and at most B resources can be deleted.

THEOREM 4.2. *Unless $P = NP$, the inapproximability holds for AWNS-D-C.*

PROOF. To show inapproximability, we reduce the $\frac{1}{k}$ -Balanced Partition problem to AWNS-D-C. Given an instance of $\frac{1}{k}$ -Balanced Partition $H^* = \{a_1, a_2, \dots, a_n\}$, we construct an instance \mathcal{A} of AWNS-D-C as follows: (a) welfare equality is required, i.e., $d = 0$ or $\rho = 1$; (b) selling yields no return, i.e., $p(r) = 0$ for all $r \in R$; and (c) each resource has unit cost, $c(r) = 1$ for all $r \in R$, and (d) selling all the resources is not allowed, $B = n + 1$. In the following, the first and second row refer to the utilities of resources of Agent 1 and Agent 2 respectively.

$$\begin{bmatrix} a_1+m & \dots & a_o+m & \dots & a_l+m & \dots & a_n+m & \dots & m^* & \dots & m^* \\ 0 & \dots & 0 & \dots & 0 & \dots & 0 & \dots & s_{\text{half}}+lm+m^* & \dots & s_{\text{half}}+om+m^* \end{bmatrix}$$

with $l = n - \lfloor \frac{n}{k} \rfloor$, $o = \lfloor \frac{n}{k} \rfloor$, m is a large enough number, $m^* = mn$, $s = \sum_{i=1}^n a_i$, and $s_{\text{half}} = \frac{n}{2}s$. Here, w.l.o.g., we assume $\frac{n}{k}$ and s_{half} are integers, s.t. $l = (k - 1)o$ and s is even. The reduction can be performed in polynomial time. Now we have further observations.

- Exactly one of the last two resources should be kept for Agent 2. Otherwise, Agent 2 gets either 0 or a too large number. The chosen one is kept for Agent 2, and the unchosen one cannot be deleted.
- Instead, the unchosen one should be transferred to Agent 1. This can ensure that Agent 1 gets at least m^* .
- If the last but one is transferred, then exactly l resources have to be deleted; if the last one is transferred, then exactly o resources have to be deleted. The latter is optimal.

H^* is a YES-instance if and only if \mathcal{A} is a YES-instance.

(\implies) Since H^* is a YES-instance, there is a subset A with $\sum_{e \in A} e = \frac{1}{2} \sum_{e \in H^*} e = s_{\text{half}}$ and $|A| = \lfloor \frac{1}{k} |H^*| \rfloor = o$. Then, we get two solutions for \mathcal{A} : (1) Transferring the last resource and deleting exactly o other resources corresponding to the resources in A . In this case, either of the two agents gets $s_{\text{half}} + lm + m^*$. (2) Transferring the last but one resource and deleting exactly l other resources corresponding to the resources in $H^* \setminus A$. In this case, either of the two agents gets $s_{\text{half}} + om + m^*$.

(\impliedby) Since \mathcal{A} is a YES-instance, two solutions exist: (a) transfer the last resource and delete o others; (b) transfer the penultimate resource and delete l others. Solution (a) is optimal for H^* .

Assume, for contradiction, that there exists a polynomial-time approximation algorithm for AWNS-D-C with approximation ratio β . For any instance of $\frac{1}{k}$ -Balanced Partition with $k - 1 \leq \beta$, the constructed AWNS-D-C instance has $\frac{l}{o} = k - 1 \leq \beta$, where o is the number of resources deleted in the optimal solution and l in the only alternative. Thus, the algorithm would return a solution with l resources to delete, thereby indirectly distinguishing between YES- and NO-instances of the $\frac{1}{k}$ -Partition problem in polynomial time, contradicting its NP-hardness unless $P = NP$.

In summary, to achieve $d = 0$ in the constructed instance of AWNS-D-C, there are at most two feasible solutions: the one deletes o resources (the optimal) and the other deletes l resources; if \mathcal{A} is a YES-instance, such two solutions exist, and otherwise no solution

exists. The construction guarantees that only these two solutions are possible, with $\frac{l}{o} = k - 1$ (which is not constant). Therefore, no polynomial-time algorithm can achieve a constant approximation ratio β for AWNS-D-C unless $P = NP$. \square

Combining Theorem 4.2 and Corollary 3.3 yields the following corollary.

COROLLARY 4.3. *Unless $P = NP$, the inapproximability holds for AWNS-D-C, AWNS- ρ -C, even when $d = 0, \rho = 1$.*

In the proof of Theorem 4.2, we observe that the instance of the $\frac{1}{k}$ -Balanced Partition problem is a YES-instance if and only if there exists an allocation for which $d = 0$ and $\rho = 1$ —that is, exactly o resources are sold. Evidently, the same reduction applies to show that AWNS-D, and AWNS-D-C are both weakly NP-hard.

COROLLARY 4.4. *AWNS-D, AWNS- ρ are both weakly NP-hard, and even when $d = 0, \rho = 1$ is given, AWNS-D-C, AWNS- ρ -C, are also weakly NP-hard.*

THEOREM 4.5. *Unless $P = NP$, the inapproximability holds for AWNS-D.*

5 AN FPTAS FOR AWNS- ρ

We continue to show an FPTAS for AWNS- ρ . A fully polynomial-time approximation scheme (FPTAS) is widely considered a desirable form of approximation algorithm, as it offers a flexible trade-off between computational efficiency and solution accuracy for many optimization problems that are typically regarded as hard. [29]

Definition 5.1 (FPTAS). A fully polynomial-time approximation scheme (FPTAS) for an optimization problem is an algorithm that, given any instance and any $\varepsilon > 0$, produces a solution with value at most $(1+\varepsilon)$ times the optimal value (for minimization problems), or at least $(1-\varepsilon)$ times the optimal value (for maximization problems), and runs in time polynomial in both the input size and $1/\varepsilon$.

Before proceeding with the proof, we offer the following remarks to help clarify the subsequent argument.

Remark. Here, we rename the set R so that the elements r_i are ordered in descending order according to the ratio $\frac{u_{i1}}{u_{i2}}$. In addition, we introduce two indices, denoted i_{\blacktriangleleft} and i_{\blacktriangleright} (with $i_{\blacktriangleleft} \leq i_{\blacktriangleright}$), which indicate the positions where transfers or sales must occur.

Remark. Since the AW algorithm does not specify how to choose the transfer sequence when multiple resources share the same value of $\frac{u_{i1}}{u_{i2}}$, we assume that the ratio-sorted list of resources follows a fixed tie-breaking rule: ties are resolved from left to right according to a predefined order (ties are resolved by resource index in increasing order).

THEOREM 5.2. *There is an FPTAS for AWNS- ρ .*

PROOF. Here is a short version. See the full paper for details.

(A) Firstly, we define a table $T[i, o, u_1, u_2, p]$ for the dynamic programming, where each entry corresponds to a tuple representing different aspects of the problem.

- i : Consider the first i resources.
- o : The number of resources to be sold.
- u_1 : The current utility for Agent 1 with respect to allocation.

- u_2 : The current utility for Agent 2 with respect to allocation.
- p : The current revenue obtained from selling the resources.

This table allows us to explore the different combinations and transitions of resources being allocated and sold, taking into consideration the utilities and costs for both agents, as well as the revenue obtained from sales. $T[i, o, u_1, u_2, p] = \perp$ (undefined) means that the combination is impossible. If it equals a tuple consisting of three sets S_0, S_1, S_2 , and a number for the cost c , i.e. $[S_0, S_1, S_2, c]$, then the combination is possible, and these three sets are the solution and c is the cost: $c(S_0)$. Here is the base:

- $T[i, o, u_1, u_2, p] = \perp$ if any index is negative or $i < o$,
- $T[0, 0, 0, 0, 0] = [0, 0, 0, 0]$,
- $T[0, o, u_1, u_2, p] = \perp$ if any of $o, u_1, u_2, p \neq 0$.

We assume that $T[i, o, u_1, u_2, p] = [S_0, S_1, S_2, c]$, and it will be updated to $[S'_0, S'_1, S'_2, c']$ only if $c' < c$. It ensures that the entry $T[i, o, u_1, u_2, p]$ only records the solution with the lowest cost. If $T[i, o, u_1, u_2, p] = \perp$, we treat its cost as a very large number and an update takes place only when the candidate cost is strictly less than the current stored cost.

Note that we divide R into $R_{[1]}$, $R_{[2]}$, and $R_{[0]}$: $r \in R_{[0]}$ if $u_1(r) = u_2(r)$, and $r \in R_{[j]}$ if $u_j(r) > u_{(3-j)}(r)$ for $j \in \{1, 2\}$. We further define $A_1 = R_{[1]}$, $A_2 = R_{[2]} \cup R_{[0]}$.

The induction rules are given in the following. Additionally, we define two indices, i^\blacktriangleleft and i^\blacktriangleright , such that resource transfer is restricted to the interval between them, within which every resource is either transferred or sold - none are retained. During computation, DP algorithm tries out all the possible choices of positions of i^\blacktriangleleft and i^\blacktriangleright as well as the direction of transfer - whether it is from A_1 to A_2 or from A_2 to A_1 . Whenever a transition leads to a cost greater than B , the corresponding table entry remains undefined.

(B) We define m_{\max} as the ceiling of half of the maximum value that occurs in the optimal solution. Here, $\mathcal{S} = \langle S_0, S_1, S_2 \rangle$ is the solution minimizing the ratio $\rho^\heartsuit = \frac{W_1(\mathcal{S})}{W_2(\mathcal{S})}$ of the instance \mathcal{I} . In this proof, we assume $W_1(\mathcal{S}) \geq W_2(\mathcal{S})$. (If this is not possible, swap the roles of Agent 1 and Agent 2 and consider both Phase 1 variants in which all utilities are initially assigned to Agent 1 or to Agent 2 (yielding four cases in total).) There must be a resource with index j_1 for S_1 such that $u_{j_1} = \max\{u_{i1} \in S_1\} = u_{\max,1}$ and a resource with index j_2 for S_2 such that $u_{j_2} = \max\{u_{i2} \in S_2\} = u_{\max,2}$, and a resource with index j_0 for S_0 such that $p_{j_0} = \max\{p_i \in S_0\} = p_{\max}$. Finally, we have $m_{\max} = \lceil \frac{1}{2} \max\{p_{\max}, u_{\max,1}, u_{\max,2}\} \rceil$.

We apply scaling to the parameters and carefully choose whether to round them up or down, ensuring that the size of the dynamic programming table remains within polynomial bounds. Here, the selection of upper and lower bounds for scaling is rigorous to ensure the validity of the subsequent inequalities. The numerical magnitude of the scaled values must be just right; if too large, they may not be polynomially bounded, and if too small, the inequalities in Lemma 5.3 may become difficult or impossible to prove. For the given instance \mathcal{I} , we rescale it to get a new instance $\hat{\mathcal{I}}$:

- (1) For each $i \in \{1, \dots, n\}$: if $u_{i1} \leq u_{\max,1}$, then $\hat{u}_{i1} \leftarrow \lceil \frac{u_{i1} \cdot n}{\epsilon' \cdot m_{\max}} \rceil$; otherwise, then $\hat{u}_{i1} \leftarrow \infty$;
- (2) For each $i \in \{1, \dots, n\}$: if $u_{i2} \leq u_{\max,2}$, then $\hat{u}_{i2} \leftarrow \lfloor \frac{u_{i2} \cdot n}{\epsilon' \cdot m_{\max}} \rfloor$; otherwise, then $\hat{u}_{i2} \leftarrow -\infty$;

- (3) For each $i \in \{1, \dots, n\}$: if $p_i \leq p_{\max}$, then $\hat{p}_i \leftarrow \lfloor \frac{p_i \cdot n}{\epsilon' \cdot m_{\max}} \rfloor$; otherwise, then $\hat{p}_i \leftarrow -\infty$.
- (4) For each $i \in \{1, \dots, n\}$: if $p_i \leq p_{\max}$, then $\hat{p}_{i+} \leftarrow \lceil \frac{p_i \cdot n}{\epsilon' \cdot m_{\max}} \rceil$; otherwise, then $\hat{p}_{i+} \leftarrow \infty$.
- (C) Among all the solutions $\langle S_0^+, S_1^+, S_2^+ \rangle$ satisfying the constraint:

$$\lceil \frac{1}{2} \max\{\max_{r_i \in S_1^+} \{u_{i1}\}, \max_{r_i \in S_2^+} \{u_{i2}\}, \max_{r_i \in S_0^+} \{p_i\}\} \rceil = m_{\max} \quad (\star)$$

(m_{\max} is still the ceiling of half of the maximum value that occurs in the optimal solution $\mathcal{S} = \langle S_0, S_1, S_2 \rangle$), let $\mathcal{S}' = \langle S'_0, S'_1, S'_2 \rangle$ be the optimal one for the scaled instance $\hat{\mathcal{I}}$.

Let ρ^\heartsuit be the ratio of \mathcal{S} wrt. \mathcal{I} , ρ^\diamond be the ratio of \mathcal{S} wrt. $\hat{\mathcal{I}}$. Let ρ^\blacktriangleleft be the ratio of \mathcal{S}' wrt. \mathcal{I} and ρ^\blacktriangleleft be the ratio of \mathcal{S}' wrt. $\hat{\mathcal{I}}$. The following lemma is central to our analysis.

LEMMA 5.3. $\rho^\blacktriangleleft \leq (1 + \epsilon)\rho^\heartsuit$.

The proof of Lemma 5.3 is intricate. In essence, we show that:

$$\rho^\blacktriangleleft \leq \rho^\blacktriangleleft \leq \rho^\diamond \leq \rho^\heartsuit(1 + \epsilon).$$

(D) There is a special case mentioned in Lemma 5.3 (Case 3.2 in the detailed version). This special case and the knapsack problem can be mutually reduced via a polynomial-time many-one reduction. Consequently, this special case also admits an FPTAS, inherently included in the dynamic programming.

(E) At the end, we show the time complexity of this dynamic programming algorithm is polynomial in the input size and in $\frac{1}{\epsilon}$. From the dynamic programming table, it is possible to find multiple solutions that minimize ρ . Among all these optimal solutions, the algorithm chooses to return those that are not Pareto dominated by any other optimal solution—that is, no other solution gives both agents at least as much welfare and one of them strictly more. \square

6 SIMULATIONS

This section presents a simulation study designed to evaluate the DSIRS framework on real-world data from the Spliddit platform [20], where each instance specifies the allocation of 1,000 tokens by n agents across m resources. The first 5,000 Spliddit instances containing between 4 and 15 resources and at least two agents were selected for analysis. For each instance, two agents were sampled at random in order to generate a two-player subproblem. Utilities were restricted to the sampled agents for solving the AWNS- ρ problem. In contrast, resource prices (representing revenues from sales) were computed using the full population of agents from the original utility matrix, whereas resource-specific selling costs were derived solely from the sampled pair. This reflects a setting in which market prices are determined by population-level valuations, while the cost of selling corresponds to the private emotional or logistical burden borne by the specific agents involved.

Each resource's selling cost and price were instantiated item-wise via one of six mode pairs (avg, avg), (max, max), (avg, max), (max, avg), (max, min), and (avg, min). For each resource $j \in [m]$, we set $c_j = \text{op}_c(u_1(j), u_2(j))$ from the sampled pair and $p_j^{\text{raw}} = \text{op}_p(\{u_i(j)\}_{i \in N})$ from the full population, where $\text{op}_c, \text{op}_p \in \{\text{avg, max, min}\}$ follow the chosen mode. Population-level prices may exceed disputants' valuations, i.e., $p_j^{\text{raw}} > \max\{u_1(j), u_2(j)\}$; we retain this to model external market pricing and stress-test

$$T[\mathbf{i}, \mathbf{o}, \mathbf{u}_1, \mathbf{u}_2, \mathbf{p}] = \begin{cases} [S_0 \cup \{r_i\}, S_1, S_2, c + c_i], & \text{if } T[\mathbf{i} - 1, \mathbf{o} - 1, \mathbf{u}_1, \mathbf{u}_2, \mathbf{p} - p_i] = [S_0, S_1, S_2, c] \wedge c + c_i \leq B, \\ [S_0, S_1 \cup \{r_i\}, S_2, c], & \text{if } T[\mathbf{i} - 1, \mathbf{o}, \mathbf{u}_1 - u_{i1}, \mathbf{u}_2, \mathbf{p}] = [S_0, S_1, S_2, c] \wedge c \leq B \text{ and } (r_i \in A_1 \text{ and } i \leq i^{\blacktriangleleft}), \\ [S_0, S_1, S_2 \cup \{r_i\}, c], & \text{if } T[\mathbf{i} - 1, \mathbf{o}, \mathbf{u}_1, \mathbf{u}_2 - u_{i2}, \mathbf{p}] = [S_0, S_1, S_2, c] \wedge c \leq B \text{ and } (r_i \in A_2 \text{ or } i \geq i^{\blacktriangleleft}). \end{cases}$$

Induction rule for AWNS- ρ (transfer from Agent 1 to Agent 2). Updates $T[\mathbf{i}, \mathbf{o}, \mathbf{u}_1, \mathbf{u}_2, \mathbf{p}]$ only when c decreases.

$$T[\mathbf{i}, \mathbf{o}, \mathbf{u}_1, \mathbf{u}_2, \mathbf{p}] = \begin{cases} [S_0 \cup \{r_i\}, S_1, S_2, c + c_i], & \text{if } T[\mathbf{i} - 1, \mathbf{o} - 1, \mathbf{u}_1, \mathbf{u}_2, \mathbf{p} - p_i] = [S_0, S_1, S_2, c] \wedge c + c_i \leq B, \\ [S_0, S_1 \cup \{r_i\}, S_2, c], & \text{if } T[\mathbf{i} - 1, \mathbf{o}, \mathbf{u}_1 - u_{i1}, \mathbf{u}_2, \mathbf{p}] = [S_0, S_1, S_2, c] \wedge c \leq B \text{ and } (r_i \in A_1 \text{ or } i \leq i^{\blacktriangleright}), \\ [S_0, S_1, S_2 \cup \{r_i\}, c], & \text{if } T[\mathbf{i} - 1, \mathbf{o}, \mathbf{u}_1, \mathbf{u}_2 - u_{i2}, \mathbf{p}] = [S_0, S_1, S_2, c] \wedge c \leq B \text{ and } (r_i \in A_2 \text{ and } i \geq i^{\blacktriangleright}). \end{cases}$$

Induction rule for AWNS- ρ (transfer from Agent 2 to Agent 1). Updates $T[\mathbf{i}, \mathbf{o}, \mathbf{u}_1, \mathbf{u}_2, \mathbf{p}]$ only when c decreases.

AWNS- ρ . For each instance and mode combination, we solved the AWNS- ρ problem using our FPTAS, where ε was fixed at 0.1, ensuring that solutions remain close to the optimal while maintaining computational scalability. To mitigate order effects, the algorithm was executed once under each agent ordering, and the better outcome was retained. For resources that were heavily dominated by one agent in terms of utility, explicit forced-allocation and forced-sale variants were also evaluated, with the best outcome selected among all considered alternatives. The random seed was fixed at 42 to ensure reproducibility of the sampling procedure. This simulation empirically evaluates the performance of our FPTAS for AWNS- ρ and examines how effectively it achieves near-equitable outcomes under different cost/price assumptions and budget limits. The simulation evaluates the *equitability of the resulting allocations*, measured by the welfare ratio ρ and the difference d between the two allocations. These measures reflect the proximity of the computed allocation to an equitable outcome under each cost/price mode and budget.

Figure 1 reports the *mean welfare ratio* ρ for each mode as a function of the budget and Figure 2 reports the *mean absolute difference* between agent utilities d for each mode as a function of the budget. The results reveal a pronounced difference in equitability across the modes. All modes exhibit sharp improvements in equitability as budget increases, particularly moving from no selling budget to any non-zero budget, where even modest budgets enable the algorithm to sell resources strategically and mitigate large imbalances. The most equitable outcomes are obtained under the average cost and average price modes. In contrast, the two modes involving minimum price (average cost, minimum price and maximum cost and minimum price) yield significantly worse equitable outcomes. This effect is attributable to the limited redistribution power when prices are pessimistically estimated.

7 OUTLOOK

In this paper, we addressed the fair allocation of indivisible resources between two agents within the DSIRS (Dispute Settlement with Indivisible Resources and Sale) framework. To avoid splitting, we proposed selling certain resources and redistributing the resulting revenue. We observed that the optimal fairness under different criteria may not be simultaneously achievable.

Building on the simplicity and transparency of the Adjusted Winner method, we formally defined a family of combinatorial problems that prohibit resource splitting. We showed that these problems are computationally intractable, with some variants even provably inapproximable. Nevertheless, we developed an FPTAS for the AWNS- ρ problem and supported it with simulations, illustrating the impact of designing selling costs and revenue schemes.

Our findings offer both theoretical insights and practical tools for fair division through resource selling. We are particularly interested in exploring Pareto optimality in future work, that is, ensuring plans that are not Pareto-dominated—no agent’s welfare can be improved without making another worse off. Here, we point to several directions for future research:

- (1) Analyzing structural properties of DSIRS instances, using theoretical tools and simulations (synthetically generated instances) of artificial data, inspired by the “map of elections” and “putting fair division on the map” [7, 28].
- (2) Investigating whether selling “problematic” resources using each agent’s conversion rate between money and utility, representing how each agent internally values monetary compensation, followed by fair revenue redistribution, can reduce utility gaps while ensuring envy-freeness and Pareto optimality. While this variant is intractable, it is worth exploring whether our FPTAS can approximate utility ratios while preserving bounded EF.
- (3) Studying a new fairness objective: maximizing the Nash product $W = W_1 \cdot W_2$, which encourages balance and guarantees Pareto optimality. This leads to the following variant:

Definition 7.1 (AWNS-NW). Given an instance of DSIRS \mathcal{I} , find $S_0 \subseteq R$ such that the AW-derived plan $\mathcal{S} = P_{AW}(S_0, \mathcal{I})$ maximizes

$$NW = W_1(\mathcal{S}, \mathcal{I}) \cdot W_2(\mathcal{S}, \mathcal{I}).$$

ACKNOWLEDGMENTS

We thank the anonymous reviewers for their constructive feedback. This work was partially supported by the Deutsche Forschungsgemeinschaft (DFG, German Research Foundation) under project COMSOC-MPMS (grant agreement No. 465371386).

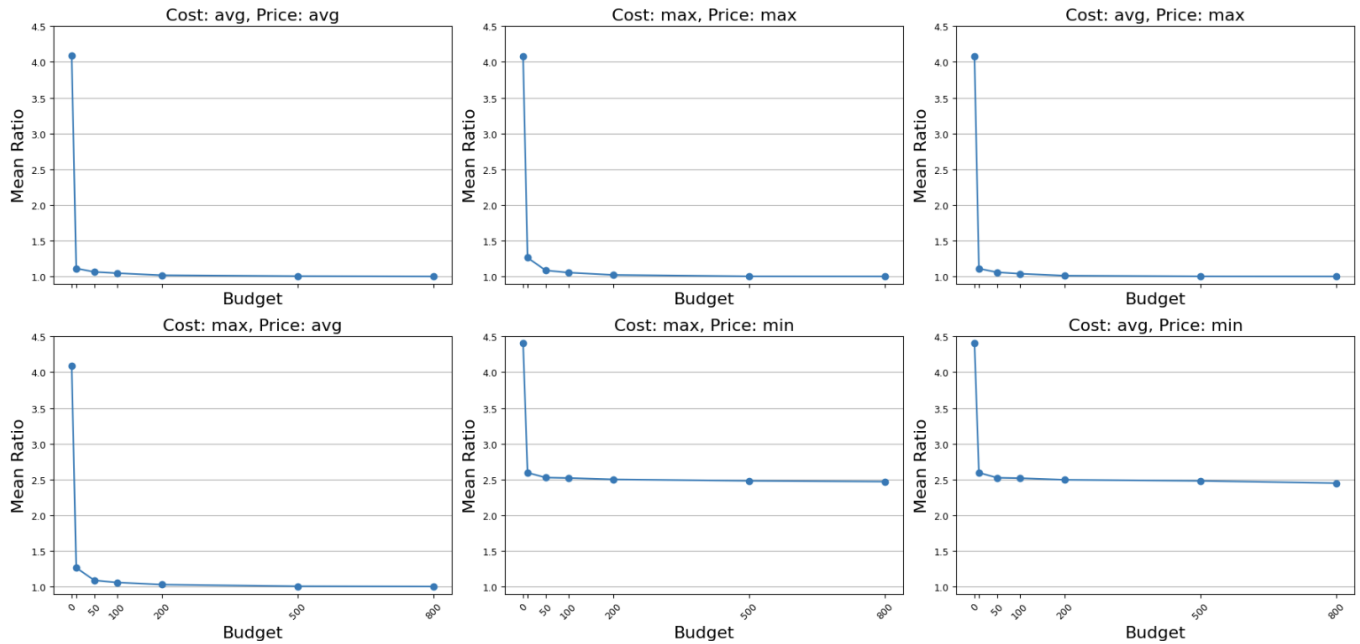


Figure 1: Mean ratio $\rho = \max(\frac{W_1}{W_2}, \frac{W_2}{W_1})$ as a function of the available budget, across six cost/price instantiations.

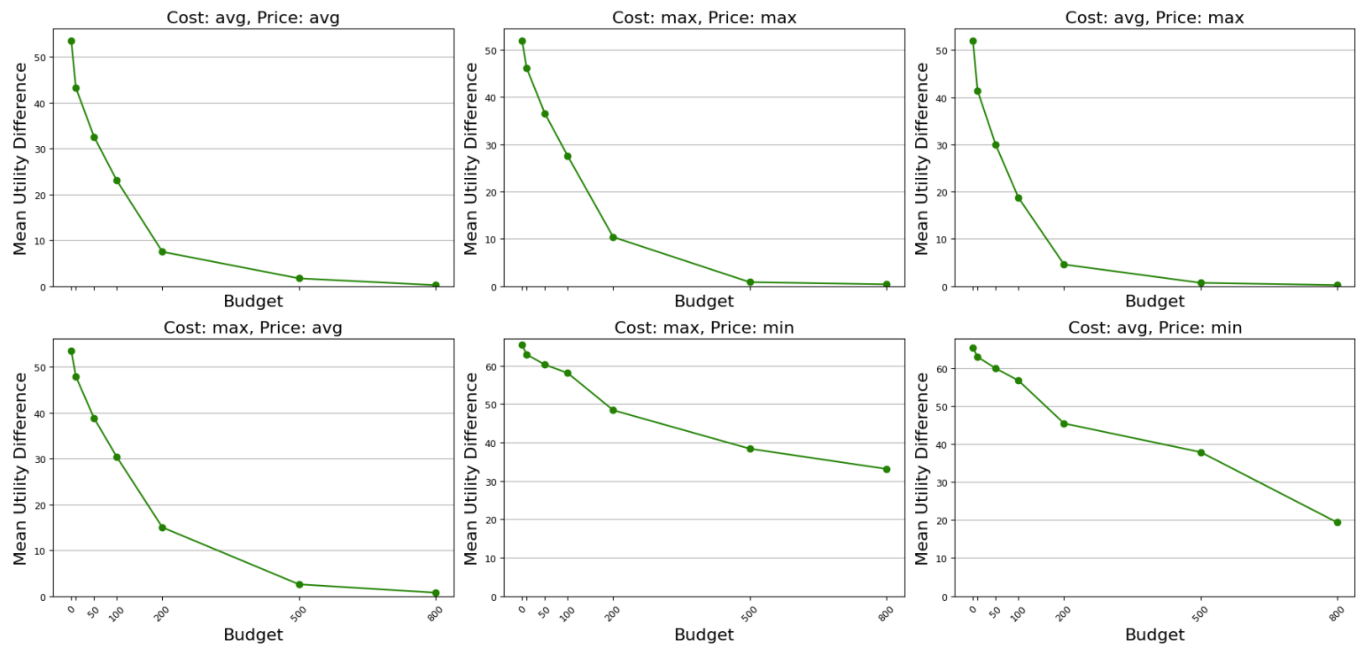


Figure 2: Mean utility difference $d = |W_1 - W_2|$ as a function of the available budget, across six cost/price instantiations.

REFERENCES

- [1] Martin Aleksandrov. 2022. Envy Freeness Up to One Item: Shall We Duplicate or Remove Resources?. In *Progress in Artificial Intelligence - 21st Conference on Artificial Intelligence (EPIA'22) (Lecture Notes in Computer Science, Vol. 13566)*. Springer, 727–738.
- [2] Georgios Amanatidis, Georgios Birmpas, Aris Filos-Ratsikas, and Alexandros A. Voudouris. 2022. Fair Division of Indivisible Goods: A Survey. In *Proceedings of the 31st International Joint Conference on Artificial Intelligence, (IJCAI' 22)*. ijcai.org, 5385–5393.
- [3] Haris Aziz, Simina Brânzei, Aris Filos-Ratsikas, and Søren Kristoffer Stiil Frederiksen. 2015. The Adjusted Winner Procedure: Characterizations and Equilibria. In *Proceedings of the 24th International Joint Conference on Artificial Intelligence, (IJCAI' 15)*. AAAI Press, 454–460.
- [4] Haris Aziz, Bo Li, Hervé Moulin, and Xiaowei Wu. 2022. Algorithmic fair allocation of indivisible items: a survey and new questions. *SIJGecom Exch.* 20, 1 (2022), 24–40.
- [5] Haris Aziz, Ildikó Schlotter, and Toby Walsh. 2016. Control of Fair Division. In *Proceedings of the 25th International Joint Conference on Artificial Intelligence, (IJCAI' 16)*. IJCAI/AAAI Press, 67–73.
- [6] Vittorio Bilò, Evangelos Markakis, and Cosimo Vinci. 2024. Achieving Envy-Freeness Through Items Sale. In *32nd Annual European Symposium on Algorithms, (ESA'24) (LIPIcs, Vol. 308)*. 26:1–26:16.
- [7] Paula Böhm, Robert Bredereck, Paul Gözl, Andrzej Kaczmarczyk, and Stanislaw Szufa. 2026. Putting Fair Division on the Map. In *Proceedings of the 40th AAAI Conference on Artificial Intelligence (AAAI'26)*. AAAI Press.
- [8] Sylvain Bouveret and Michel Lemaître. 2016. Characterizing conflicts in fair division of indivisible goods using a scale of criteria. *Autonomous Agents and Multi-Agent Systems* 30, 2 (2016), 259–290.
- [9] Steven J. Brams. 1997. Fair Division: A New Approach to the Spratly Islands Controversy. *International Negotiation* 2, 2 (1997), 303–329.
- [10] Steven J. Brams and Alan D. Taylor. 1996. *Fair division - from cake-cutting to dispute resolution*. Cambridge University Press.
- [11] Felix Brandt, Vincent Conitzer, Ulle Endriss, Jérôme Lang, and Ariel D. Procaccia (Eds.). 2016. *Handbook of Computational Social Choice*. Cambridge University Press.
- [12] Robert Bredereck, Bin Sun, Eyal Briman, and Nimrod Talmon. 2026. Adjusted Winner: from Splitting to Selling. arXiv:2602.12231 [cs.GT] <https://arxiv.org/abs/2602.12231>
- [13] Johannes Brustle, Jack Dippel, Vishnu V. Narayan, Mashbat Suzuki, and Adrian Vetta. 2020. One Dollar Each Eliminates Envy. In *Proceedings of the 21st ACM Conference on Economics and Computation (EC'20)*. ACM, 23–39.
- [14] Ioannis Caragiannis and Stavros Ioannidis. 2021. Computing Envy-Freeable Allocations with Limited Subsidies. In *Proceedings of 17th International Conference on Web and Internet Economics (WINE '21) (Lecture Notes in Computer Science, Vol. 13112)*. Springer, 522–539.
- [15] Mithun Chakraborty, Ayumi Igarashi, Warut Suksompong, and Yair Zick. 2021. Weighted Envy-freeness in Indivisible Item Allocation. *ACM Transactions on Economics and Computation* 9, 3 (2021), 18:1–18:39.
- [16] Bhaskar Ray Chaudhury, Telikepalli Kavitha, Kurt Mehlhorn, and Alkmini Sgouritsa. 2021. A Little Charity Guarantees Almost Envy-Freeness. *SIAM J. Comput.* 50, 4 (2021), 1336–1358.
- [17] Nicolas Dupuis-Roy and Frédéric Gosselin. 2009. An Empirical Evaluation of Fair-Division Algorithms. In *Proceedings of the 31st Annual Meeting of the Cognitive Science Society (CogSci'09)*. Cognitive Science Society, Amsterdam, The Netherlands, 31–36.
- [18] Piotr Faliszewski and Jörg Rothe. 2016. Control and Bribery in Voting. In *Handbook of Computational Social Choice*, Felix Brandt, Vincent Conitzer, Ulle Endriss, Jérôme Lang, and Ariel D. Procaccia (Eds.). Cambridge University Press, 146–168.
- [19] Jay Folberg. 2009. Mediating Family Property and Estate Conflicts. *JAMS Dispute Resolution ALERT* 9 (2009).
- [20] Jonathan Goldman and Ariel D Procaccia. 2015. Spliddit: Unleashing fair division algorithms. *ACM SIGecom Exchanges* 13, 2 (2015), 41–46.
- [21] Daniel Halpern and Nisarg Shah. 2019. Fair Division with Subsidy. In *Proceedings of 12th International Symposium, (SAGT'19) (Lecture Notes in Computer Science, Vol. 11801)*. Springer, 374–389.
- [22] John J. Bartholdi III, Craig A. Tovey, and Michael A. Trick. 1992. How Hard Is It to Control an Election? *Mathematical and Computer Modelling* 16, 8–9 (1992), 27–40.
- [23] D. Marc Kilgour and Rudolf Vetschera. 2024. Two-Person Fair Division with Additive Valuations. *Group Decision and Negotiation* 33, 4 (2024), 745–774.
- [24] Tansa George Massoud. 2000. Fair Division, Adjusted Winner Procedure (AW), and the Israeli-Palestinian Conflict. *Journal of Conflict Resolution* 44, 3 (2000), 333–358.
- [25] Eric Pacuit. 2011. In *Proof, Computation and Agency - Logic at the Crossroads*, Johan van Benthem, Amitabha Gupta, and Rohit Parikh (Eds.). Synthese library, Vol. 352. Springer, 229–239.
- [26] Benjamin Plaut and Tim Roughgarden. 2020. Almost Envy-Freeness with General Valuations. *SIAM Journal on Discrete Mathematics* 34, 2 (2020), 1039–1068.
- [27] Samer Salame, Eric Pacuit, and Rohit Parikh. 2005. Some Results on Adjusted Winner. *Synthese* 142, 1 (2005), 1–30.
- [28] Stanislaw Szufa, Piotr Faliszewski, Piotr Skowron, Arkadii Slinko, and Nimrod Talmon. 2020. Drawing a Map of Elections in the Space of Statistical Cultures. In *Proceedings of the 19th International Conference on Autonomous Agents and Multiagent Systems (AAMAS '20)*. 1341–1349.
- [29] Vijay V. Vazirani. 2001. *Approximation Algorithms*. Springer.